


Binding machine in-line

KA145

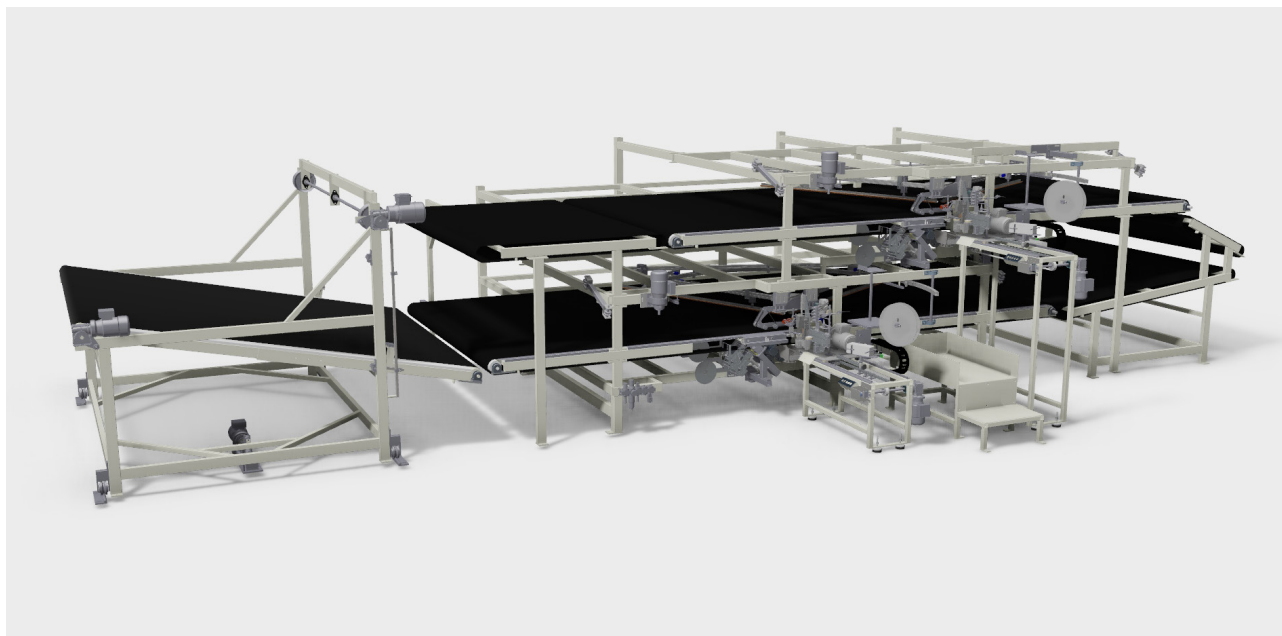

The fabric is transported to next free sewing station, where it is bound around all sides with round corners. The tape is trimmed and reloaded automatically. The end of the tape is in-folded at the end and the thread is cut. It is possible to add 2 sections in a row if there is need for higher production.

Each section can sew approximately 2 quilts per minute. After sewing the quilt is transported out onto the stacking table or directly into the folding and packing machines.

TECHNICAL SPECIFICATION

Length x width	10.5m x 4.3m
Quilts per minute	2