


Binding machine stand alone

KA145

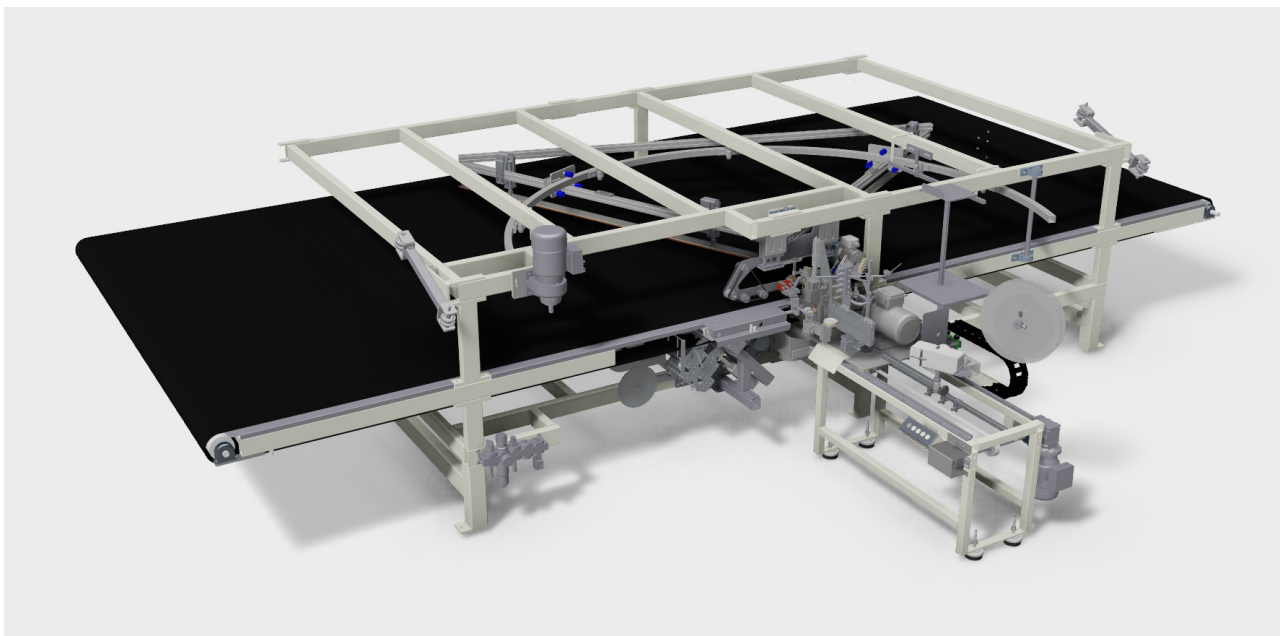

The bedspread or quilt is manually loaded and positioned on the infeed conveyor and then fed into the binding station. It is bound around all sides with round corners. The tape is trimmed and reloaded automatically. The end of the tape is in-folded at the end and the thread is cut. After sewing the quilt is transported out onto the stacking table or directly into the folding and packing machines.

TECHNICAL SPECIFICATION

Length x width	7m x 4.3m
Quilts per minute	1